


# A-3A-F

## TERMOFUSIBILE RADIALE

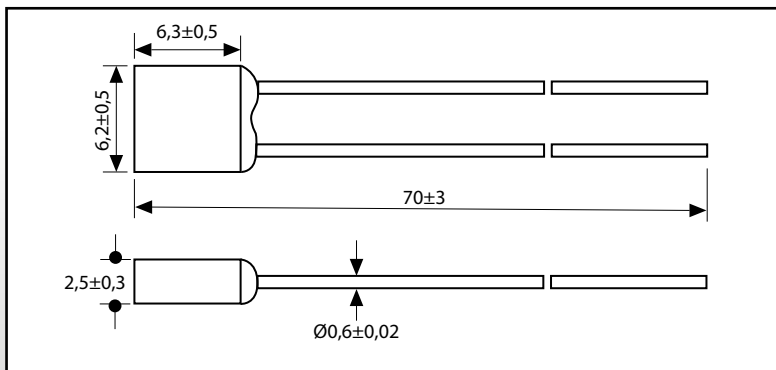

Model	Rated Function Temperature TF	Cutoff temperature	Holding Temperature TH	Maximum Temperature Limit TM	Rating Current IR	Rating Voltage UR
A0-3A-F	84°C	82°C ±2°C	40°C	180°C	3A	250Vac
A1-3A-F	102°C	98°C ±2°C	63°C	180°C	3A	250Vac
A2-3A-F	115°C	112°C ±3°C	75°C	180°C	3A	250Vac
A3-3A-F	125°C	120°C ±3°C	85°C	180°C	3A	250Vac
A4-3A-F	130°C	126°C ±2°C	90°C	180°C	3A	250Vac
A5-3A-F	135°C	131°C ±3°C	90°C	180°C	3A	250Vac
A7-3A-F	138°C	135°C ±2°C	93°C	180°C	3A	250Vac
A8-3A-F	150°C	145°C ±3°C	105°C	180°C	3A	250Vac

### APPROVALS

RoHS UL C-UL VDE CCC PSE



**RD**  
&  
**Components S.r.l.**

Via Bergamo 6 - 20835 Muggiò(MB) ITALY  
Tel. +39 039 2328773 Fax: +39 039 2317952  
[www.rdcomponents.com](http://www.rdcomponents.com) - [www.rdc-service.it](http://www.rdc-service.it)

