


KWCE-171-4B

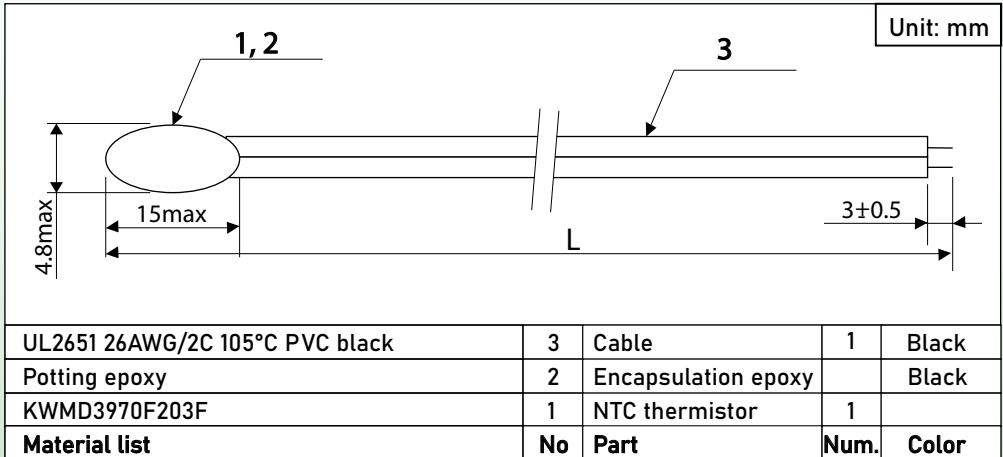

TECHNICAL SPECIFICATION

Nominal resistance: $R_{25}=20K\Omega\pm 1\%$

B-value: $B_{0/100}=3970K\pm 1\%$

Working temperature range: $-20^{\circ}C +105^{\circ}C$

Insulation resistance: $>100M\Omega$ at 500VDC in water

Voltage endurance: Applying 1800VAC/2S between shell and cable, there is no flash or broken

Fixing protective tube, applying 10N/3S static pull strength along cable, no change for the appearance