


KWCT-171-18

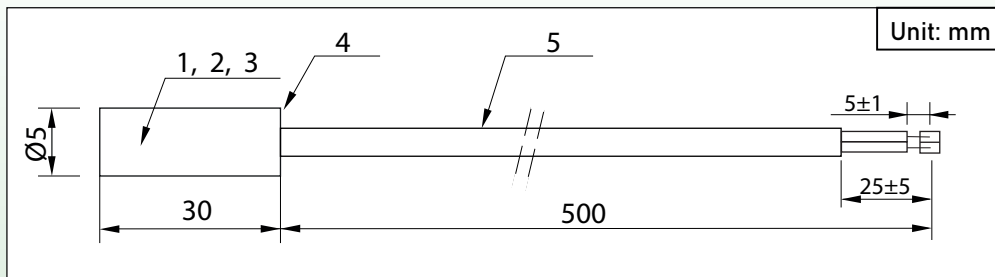

Ø3.3mm 24# (2/12*0.15) PE shield round cable	5	Cable	1	Black
5*30 Nickle plated copper tube	4	Tube	1	
Potting epoxy	3	Potting epoxy		
Coating epoxy	2	Coating epoxy		Black
KWMD3435F103F	1	NTC Thermistor	1	
Material list	No	Part	Num.	Color

TECHNICAL SPECIFICATION

Nominal resistance: $R_{25}=10K\Omega \pm 1\%$

B-value: $B_{25/85}=3977K \pm 1\%$

Working temperature range: $-20^{\circ}C +105^{\circ}C$

Insulation resistance: $>100M\Omega$ at 500VDC in water

Voltage endurance: Applying 1800VAC/2S between shell and cable, there is no flash or broken

Fixing protective tube, applying 10N/3S static pull strength along cable, no change for the appearance