


KWCT-171-6-2.5

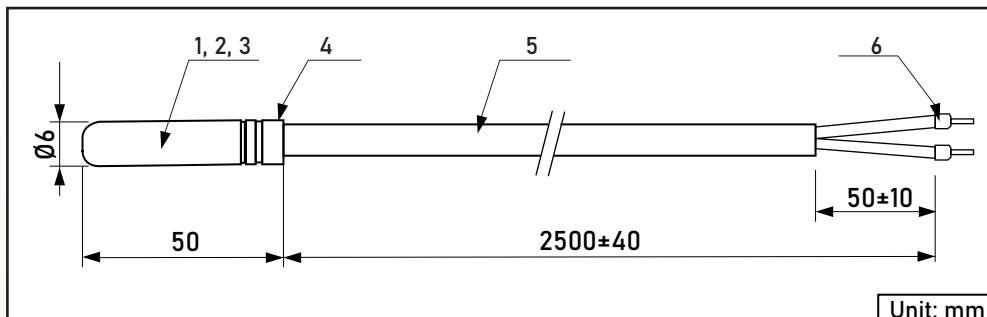

Unit: mm				
MATERIAL DETAILS	No.	PART	Qty	COLOR
VE0508 red connector	6	Connector	2	Red
0.35 mm ² silicon jacketed cable	5	Cable	1	Grey
∅ 6x50 shell, SUS304	4	Shell	1	
Potting epoxy	3	Potting epoxy		
Package epoxy	2	Package epoxy		Black
UST Sensor PT100 2108 class A	1	PT100 sensor	1	

TECHNICAL SPECIFICATIONS

Thermistor: UST Sensor PT100 2108 class A

Working temperature range: -20°C +180°C

Insulation resistance: >100MΩ at 500VDC in water

Fixing protective tube: Applying 10N/3S static pull strength along the cable, no change for the appearance

Connector: can afford 10N/min static strength, no change for the product appearance

ROHS compliant