


N3SLMT-K41-RAD31

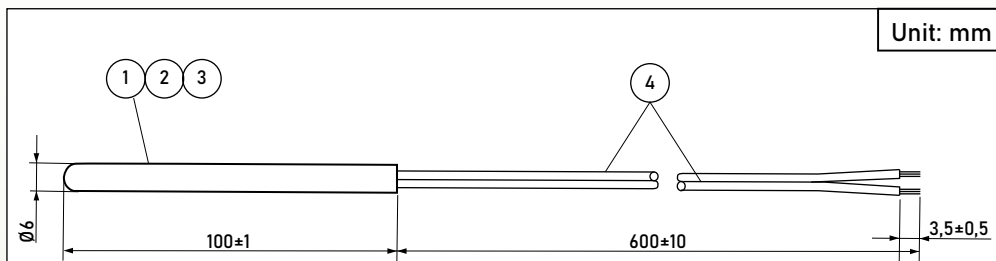

1	Lead Wire	PVC	AWG24 (Red/Red)
2	Metal cap	SUS	
3	Resin	EPOXY	(Black)
4	Thermistore		R(25°C)=10.0KΩ±3% B(25/85)=3945K±2%
No	PART NAME	MATERIAL	STANDARD

TECHNICAL SPECIFICATION

Nominal resistance: R25=10KΩ±3%

B-value: 25/85=3945K

Working temperature range: -10°C +110°C

SUS housing degree of protection: IP68