


ANTICONDENSATION HEATER

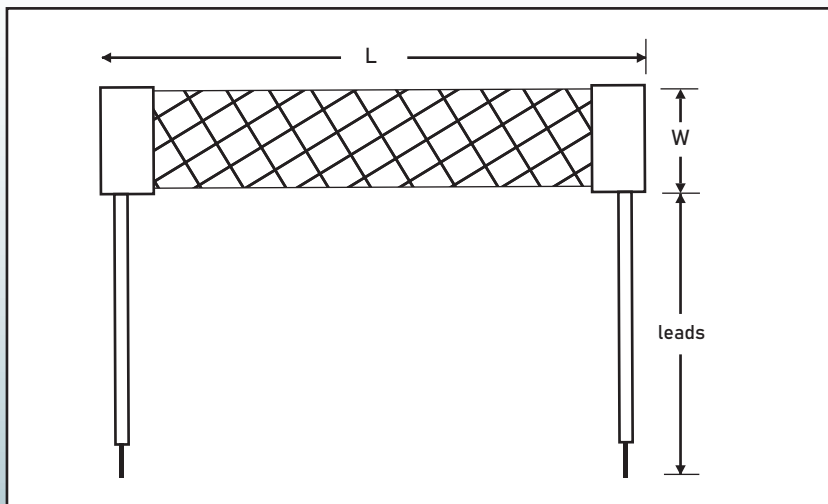

Power rating	Voltage	L (mm)	W (mm)	Leads
8 W	230 V	203	16	500
25 W	230 V	400	16	500
50 W	230 V	1060	16	600
75 W	230 V	1700	16	800
150 W	230 V	1500	16	1200

Lead Wire AWG 24 (7/32) or AWG 22 (19/34).
PTFE (Teflon) insulated, Flexible Tinned Copper wire.

Tolerance in Power Rating	±5%
Insulation Resistance	Min. 10 Mega Ohm
High Voltage Test	2 KV for 1 minute