


# CS2

## THERMAL PROTECTOR CURRENT SENSITIVE SUITABLE FOR VACUUM IMPREGNATION

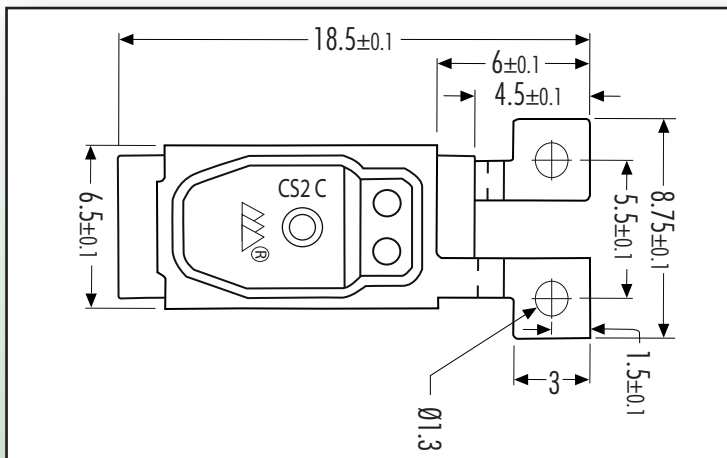

### TECHNICAL SPECIFICATION

<b>Contact configuration</b>	Normally closed
<b>Rated current</b>	125VAC/12A - 250VAC/8A
<b>Switching cycles</b>	10.000
<b>Dimensions</b>	15 x 6 x 3 mm
<b>Nominal temperatures</b>	40°C - 175°C
<b>Tolerance</b>	$\pm 5^\circ\text{C}$
<b>Reset temperature</b>	2/3 opening temperature
<b>Approvals</b>	UL, VDE, CQC, TUV

