


JRMA

THERMAL PROTECTOR

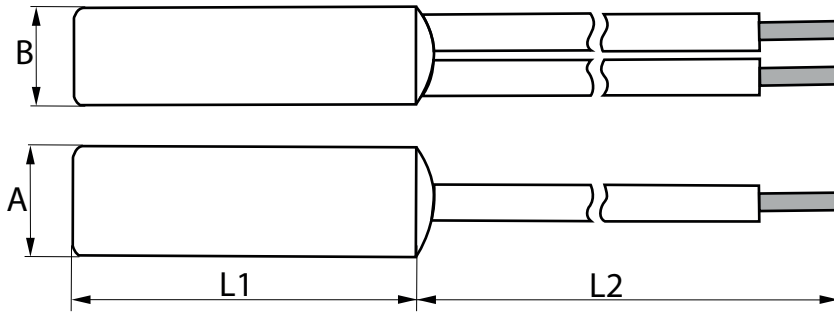

A (width): 5.3 ± 0.2

B (thickness): 4.0 ± 0.2

L1 (length): 15.8 ± 1

L2 : according to customer's requirement

TECHNICAL DATA

Contact configuration	Normalmente chiusi/aperti
Rated current	2A/AC120V, 2A/DC24V
]Switching cycles	100.000
Temperature working range	-20° / +200°C
Tolerance	$\pm 5^\circ\text{C}$
Temperature step	5°C
Temperature reset	1°/3° C