


KSD9700

THERMAL PROTECTOR

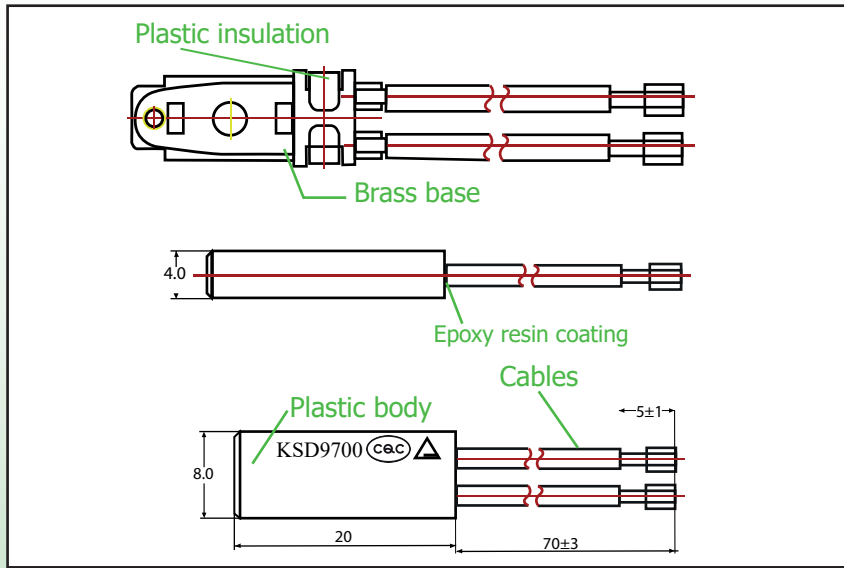

TECHNICAL SPECIFICATION

Contact configuration	Normally closed
Rated current	250VAC/5A
Switching cycles	10.000
Dimensions	8x4x20 mm
Nominal temperatures	20°C - 150°C
Tolerance	±5°C
Approvals	TUV, CQC

