


KW-3B

THERMAL PROTECTOR

CURRENT SENSITIVE

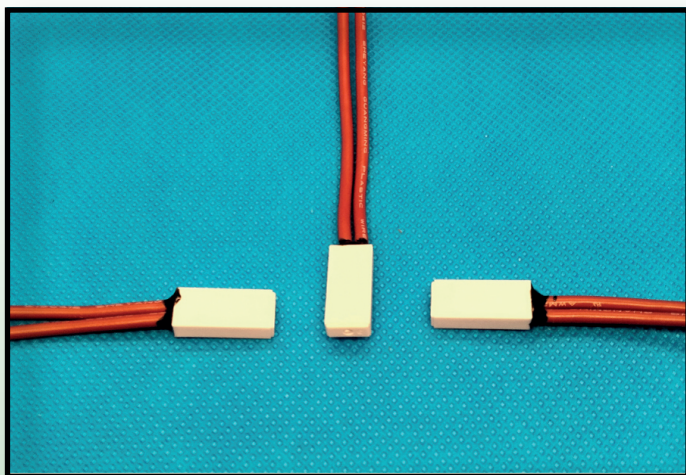

TECHNICAL SPECIFICATION

Contact configuration	Normally closed
Rated current	250VAC/5A
Number of automatic cycles	10.000
Dimensions	15,8x7,2x3,8 mm
Nominal temperature	40°C - 165°C
Tolerance	±5°C
Reset temperature	-40°C±15°C ≥27°C



EN 60079-15



RD
&
Components S.r.l.

Via Bergamo 6 - 20835 Muggiò(MB) ITALY
Tel. +39 039 2328773 P.IVA 12934630158
www.rdcomponents.com - www.rdc-service.it

RD
&
Service

