


PTC THERMISTOR

TECHNICAL DATA

Maximum load	30V
Nominal temperature	60° to 190°C
Tolerance	±5K
Resistance at 25°C	single: ≤100Ω triple: ≤300Ω
Strength of insulation	2,5 kV
Maximum working temperature	200°C
Room temperature	-25°C to +200°C

Dimensions in mm

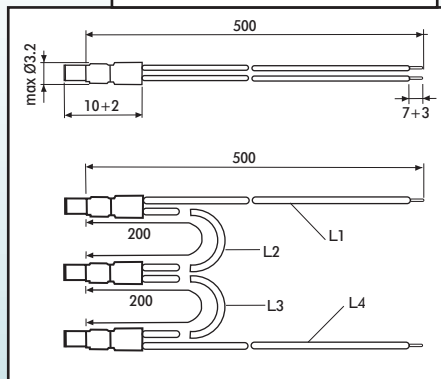

TN	Colori	Singolo	Triplo
60	white/grey	MF1-E060	MF1-D060
70	white/brown	MF1-E070	MF1-D070
80	white/white	MF1-E080	MF1-D080
90	green/green	MF1-E090	MF1-D090
100	red/red	MF1-E100	MF1-D100
110	brown/brown	MF1-E110	MF1-D110
120	grey/grey	MF1-E120	MF1-D120
130	blue/blue	MF1-E130	MF1-D130
140	white/blue	MF1-E140	MF1-D140
145	white/black	MF1-E145	MF1-D145
150	black/black	MF1-E150	MF1-D150
155	blue/black	MF1-E155	MF1-D155
160	blue/red	MF1-E160	MF1-D160
170	white/green	MF1-E170	MF1-D170
180	white/red	MF1-E180	MF1-D180
190	black/grey	MF1-E190	MF1-D190

ORDER CODE EXAMPLE

MF1 - V150 - 250/100

Type | Type of wiring | Temperature | Cable length

Type of wiring: E: single, Z: double,
D: triple, V: quadruple,
S: sextuple, N: ninefold