




QUICK-CONNECT TERMINAL BLOCK

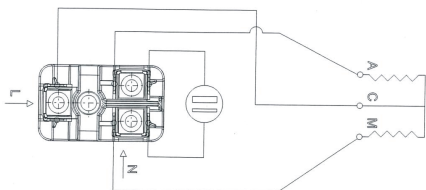


SINGLE PHASE CONNECTION

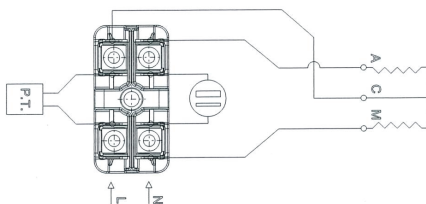

**SINGLE PHASE CONNECTION
AND CIRCUIT SWITCH PROTECTOR**

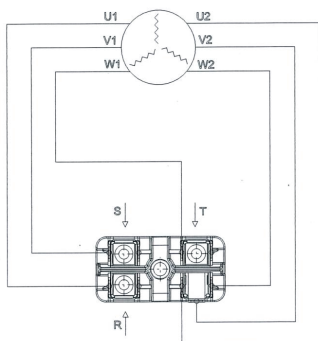

**THREE-PHASE
STAR CONNECTION**

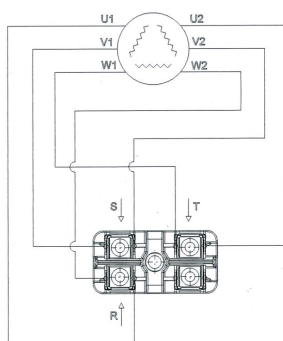

**THREE-PHASE
DELTA CONNECTION**

Raw material	PA66 FV25% V0 UL94 0,75mm
Screws	galvanized iron
Clamp	galvanized iron
Working temperature	up to 100°C
Electrical connections	faston 6,3 x 0,8 mm / cables 12AWG
Tension	up to 600V
Current intensity	up to 16A