





TOMIC S.A.



AMR03DT

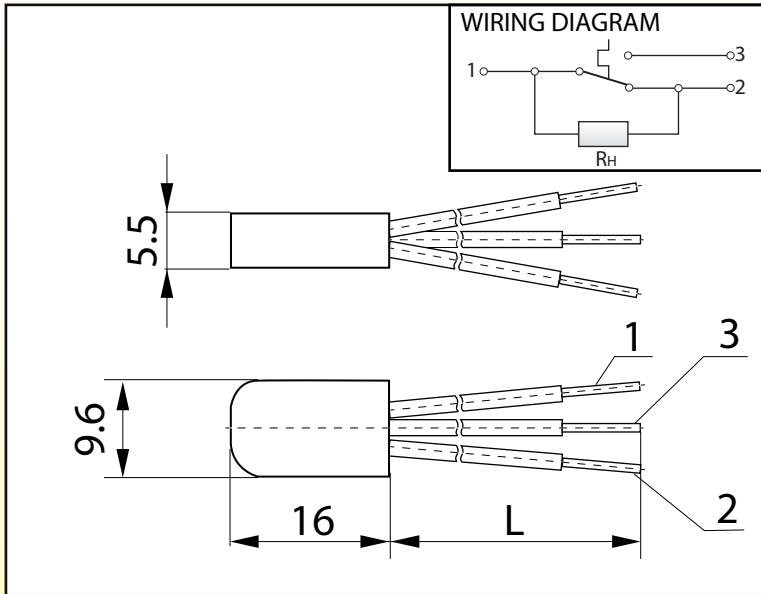

TECHNICAL DATA

Contact configuration	SPDT, Normally closed
Rated current	2,5A/250V
Automatic cycles	3.000
Temperature range	65° - 160°C
Standard tolerance	±5K/±10K
Reset temperature	Manual
Electrical strenght of insulation	2.500V / 50Hz

RD
Components S.r.L

Via Bergamo 6 - 20835 Muggiò(MB) ITALY
Tel. +39 039 2328773 P.IVA 12934630158
www.rdcomponents.com - www.rdc-service.it

RD
Service