
DEFROST TIMER

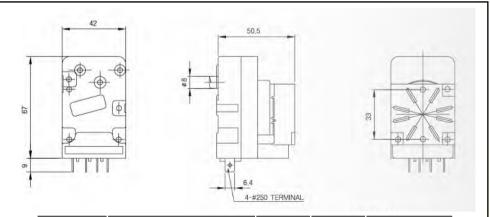

MODEL		Time		Rated	Switch	
NAME		Cycle	Defrost	Voltage	rating	consumption
TD	20LSA/ CSA	6 hours and 40 minutes	12 minutes	110/220V	AC125/6A	than
	20C	6 hours and 40 minutes	5minutes and 50 seconds	2200		
	20NT/ NS	10 hours and 4 minutes	9 minutes	110/220V		
	CVD	12 hours	10minutes and 48 seconds	240V		
	CAF	3 hours and 20 minutes	22minutes and 48 seconds	240V		

Application:

Refrigerator, Show case, Freezer

Function:

Remove frost on the surface of an evaporator and in the inside of refrigeration room by controlling the power supply compressor and defrost heater periodically

Features:

Low power consumption based on the method of synchronous motor using a permanent magnet. Constant time for defrost and cycles by delivering motor rotation to the gear to reduce it

> Certification: C-UL, TUV





Via Bergamo 6 - 20835 Muggiò(MB) ITALY Tel. +39 039 2328773 P.IVA 12934630158 www.rdcomponents.com - www.rdc-service.it

