


BT-121-M

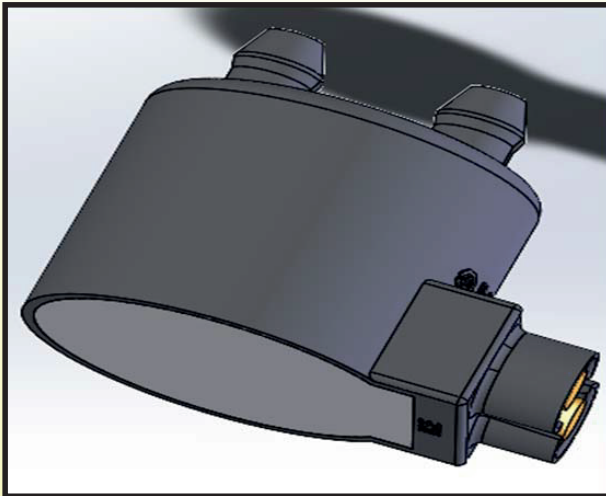

Application - Microwave Ovens, Refrigerators, Vending Machines, Hot Water Heaters, Boilers, Tableware Dryers, etc...

Function:

- Automatic temperature control and prevention from overheating
- Small size with high current rating and low internal resistance

TECHNICAL DATA

Rated Current	AC 125V/6A - 250V/3A
Temperature Range	-20°C to +60°C
Reset Temperature	10°C Min.
On/Off Differential	Min.10°C, Normal 15 to 25°C
Temperature Tolerance	±3°C (Standard ±5°C)
Life Cycle	100.000 at rated load
Dielectric Withstand	AC 1,8kV for 1 second
Insulation Resistance	100mΩ Min
Internal Resistance	100mΩ Max (including lead wires resistance)
Lead Wire specification	UL1015 AWG18 STANDED



E126365



B0705
62807004