
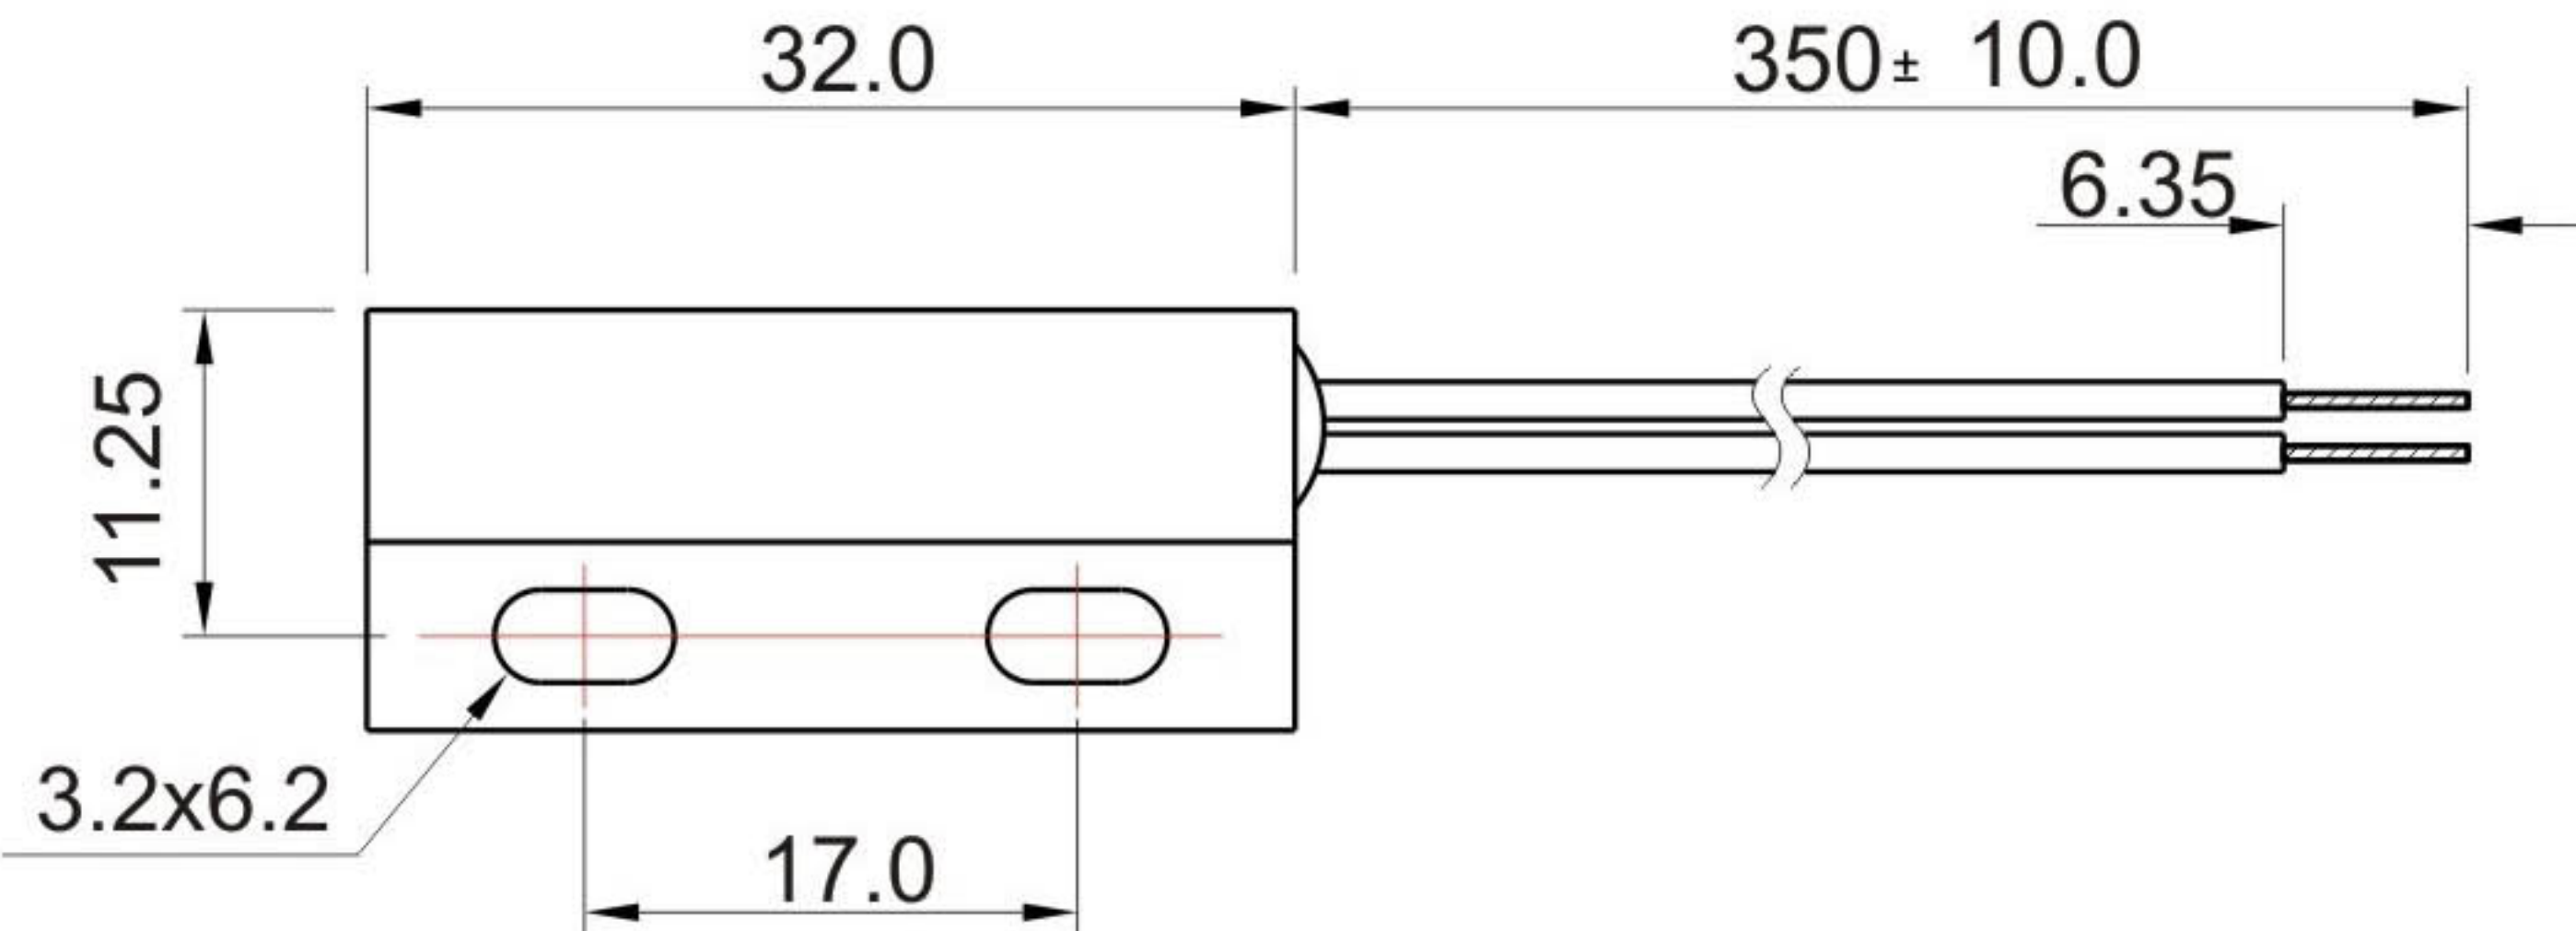
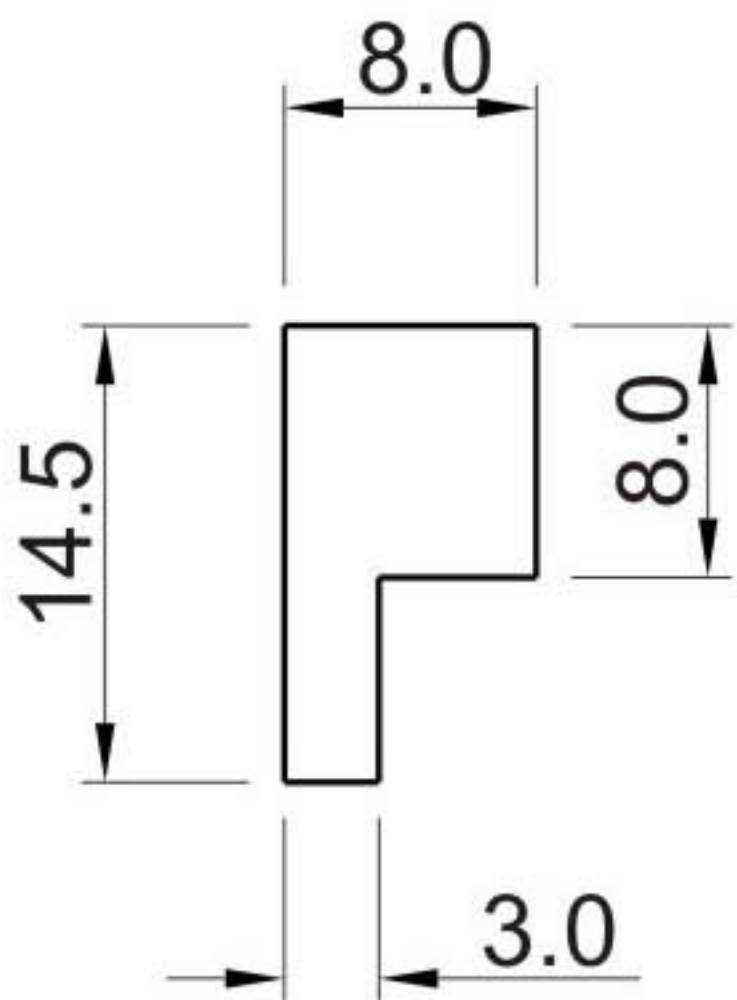
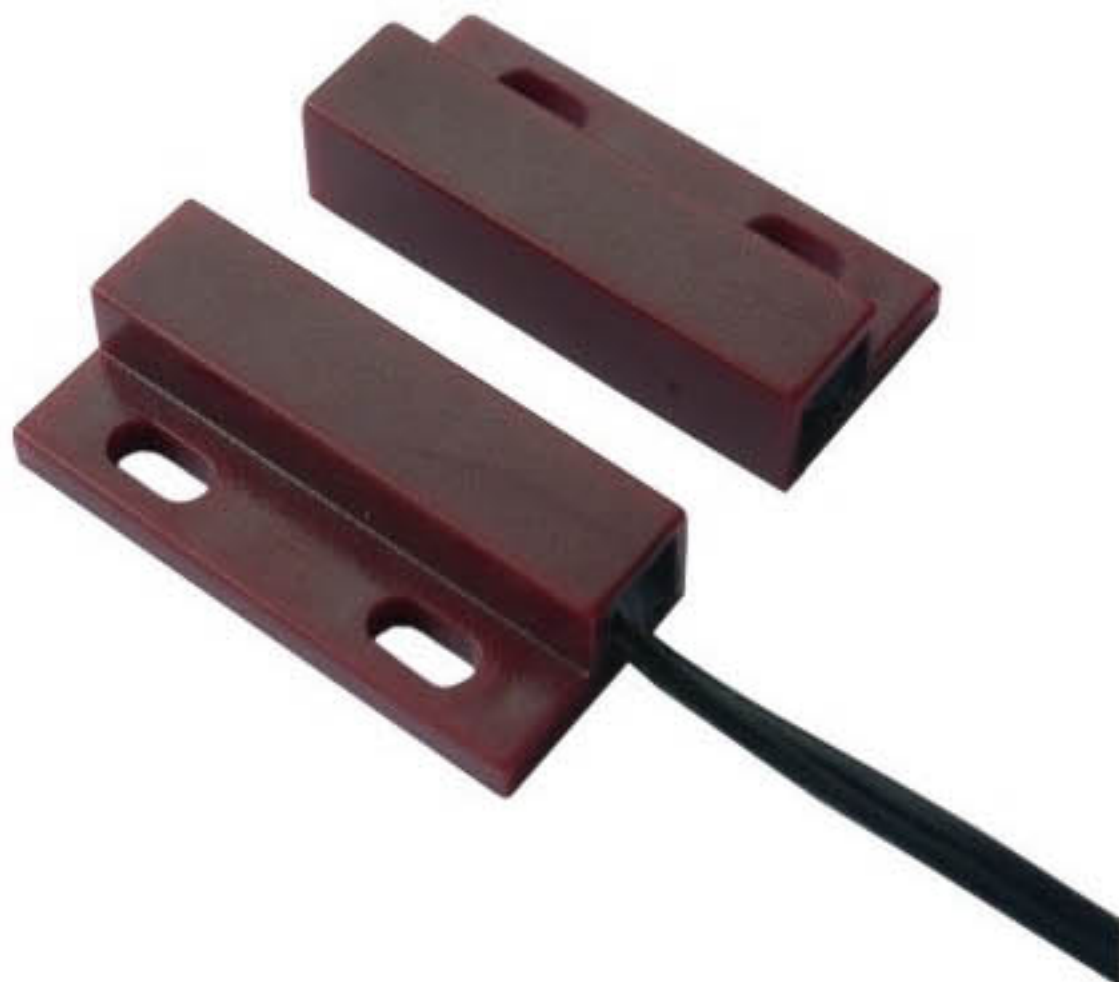
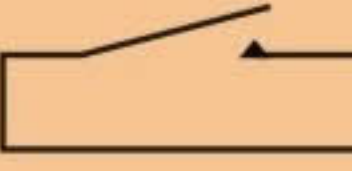
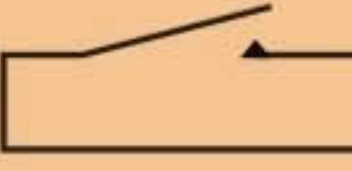
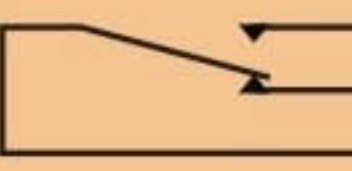


Dimensions mm(in)

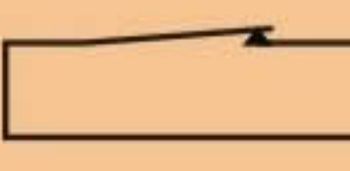

Contact Type 触点形式	 Black Black	 Red Red	 Black Blue White	 Black Black
	Normally Open 常开型	Normally Open High Voltage 高电压常开型	Change Over 单极双投型	Normally Closed 常闭型
Switched Power (max) 最大开关功率	10W	30W	3W	3W
Switched Voltage (max) 最大开关电压	DC200V	DC250V AC260V	DC175V AC125V	DC175V AC125V
Breakdown Voltage (min) 最小击穿电压	DC250V	750V	200V	200V
Switched Current (max) 最大开关电流	0.5A	1.0A	DC0.4A AC0.28A	DC0.4A AC0.28A
Carry Current (max) 最大负载电流	1.2A	2.5A	0.5A	0.5A
Contact Resistance (initial max) 最大接触阻抗	0.2Ω	0.2Ω	0.2Ω	0.2Ω
Insulation Resistance (min) 最小绝缘阻抗	10 ⁸	10 ⁸	10 ⁸	10 ⁸
Operating Temperature 工作温度范围	-40 to +80	-40 to +80	-40 to +80	-40 to +80