


A-3A-F

RADIAL THERMALFUSE

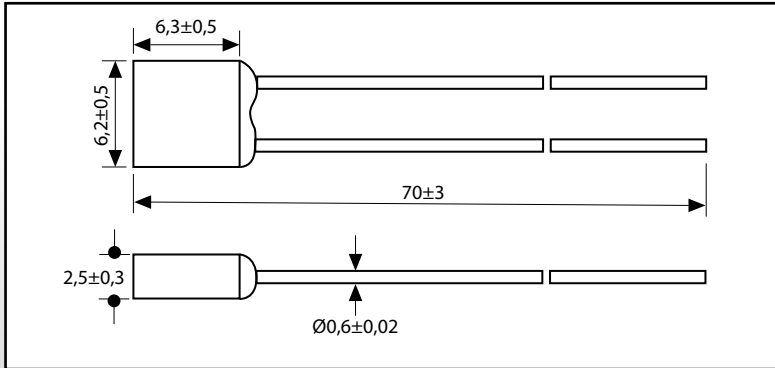

Model	Rated Function Temperature TF	Cutoff temperature	Holding Temperature TH	Maximum Temperature Limit TM	Rating Current IR	Rating Voltage UR
A0-3A-F	84°C	82°C $\pm 2^\circ\text{C}$	40°C	180°C	3A	250Vac
A1-3A-F	102°C	98°C $\pm 2^\circ\text{C}$	63°C	180°C	3A	250Vac
A2-3A-F	115°C	112°C $\pm 3^\circ\text{C}$	75°C	180°C	3A	250Vac
A3-3A-F	125°C	120°C $\pm 3^\circ\text{C}$	85°C	180°C	3A	250Vac
A4-3A-F	130°C	126°C $\pm 2^\circ\text{C}$	90°C	180°C	3A	250Vac
A5-3A-F	135°C	131°C $\pm 3^\circ\text{C}$	90°C	180°C	3A	250Vac
A7-3A-F	138°C	135°C $\pm 2^\circ\text{C}$	93°C	180°C	3A	250Vac
A8-3A-F	150°C	145°C $\pm 3^\circ\text{C}$	105°C	180°C	3A	250Vac

APPROVALS

RoHS UL C-UL VDE CCC PSE



RD
&
Components S.r.l.

Via Bergamo 6 - 20835 Muggiò(MB) ITALY
Tel. +39 039 2328773 P.IVA 12934630158
www.rdcomponents.com - www.rdc-service.it

